



PART NO. **1559070** - CHROME PLATED PART NO. **1559073** - STAINLESS STEEL

SPRING NECK PULL-DOWN FAUCET


- Ceramic cartridge
- Use with baseplate for 8" 3-hole installation
- Use without base plate for 1-hole installation
- Max Flow Rate 1.8GPM(6.8LPM) at 60PSI (ASME.A112.18.1M)
- Integral stainless steel braided supply lines with 3/8" COMP connection
- Includes matching soap/lotion dispenser
- Boxed
- · Limited lifetime warranty

Meets or exceeds the following:

- ANSI/ASME A112.18.1M
- ANSI/NSF 61-Sec.9
- IAPMO/CUPC
- ADA Compliant





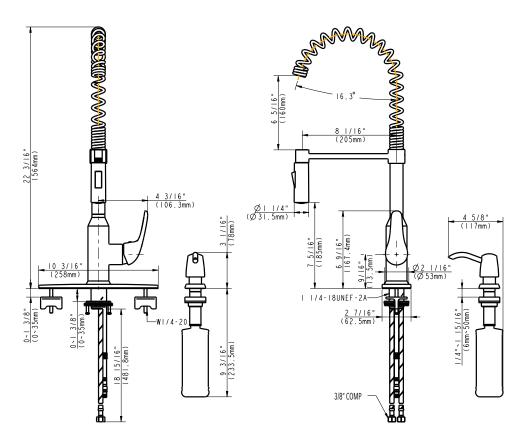






PART NO. **1559070** - CHROME PLATED PART NO. **1559073** - STAINLESS STEEL

SPRING NECK PULL-DOWN FAUCET

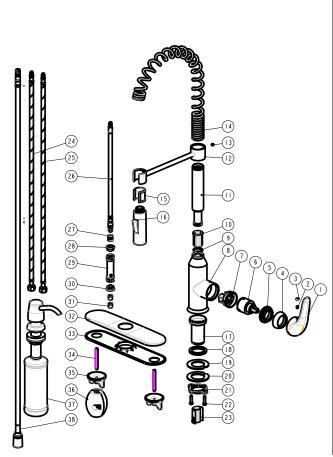

| No. | Component Description |
|-----|---------------------------------|
| 1 | Handle |
| 2 | Screw |
| 3 | Index Button |
| 4 | Dome Nut |
| 5 | Cartridge Cap |
| 6 | Cartridge |
| 7 | Cartridge Base |
| 8 | Faucet Body |
| 9 | O-ring |
| 10 | Connector |
| 11 | Sleeve |
| 12 | Holder |
| 13 | Screw |
| 14 | Sping |
| 15 | C-chip |
| 16 | Spray Head |
| 17 | Sleeve |
| 18 | Gasket |
| 19 | Gasket |
| 20 | Gasket |
| 21 | Fixing Nut |
| 22 | Screw |
| 23 | Fixing Cap |
| 24 | 24" Stainless Steel Supply Line |
| 25 | 24" Stainless Steel Supply Line |
| 26 | Inlet Tube |
| 27 | Protect Cap |
| 28 | Fixing Ring |
| 29 | Connector |
| 30 | Fixing Ring |
| 31 | Check valve |
| 32 | Deckplate |
| 33 | Bottom Plate |
| 34 | Stud |
| 35 | Nut |
| 36 | Counter Weight |
| 37 | Soap Dispenser |
| 38 | Spray Hose |

