

# San Souci<sup>®</sup> Comfort Height<sup>®</sup>

# one-piece compact elongated 1.28 gpf toilet

K-4000

### Features

- Flush is activated by a no-touch sensor mounted inside the tank.
- Powered by 4 AA batteries (included).
- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Low-profile design.
- Comfort Height<sup>®</sup> feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Concealed trapway and Clean Caps® facilitate easier cleaning and enhanced design.
- Includes K-4008 Reveal<sup>®</sup> Quiet-Close<sup>™</sup> with Grip-Tight seat.
- When batteries are low, the unit will beep five times at half-second intervals when activated to indicate it's time to replace them.

# Technology

- Touchless module projects a field through the top of the tank lid that senses your hand, causing the toilet to flush.
- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- AquaPiston canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Light-touch canister flush requires a lower actuation force than a flapper.

### Installation

- Touchless only adds three simple steps to installation.
- Standard 12-inch rough-in.
- DryLock<sup>™</sup> System saves installation time and helps prevent water leakage.
- Supply line not included.

### Water Conservation & Rebates

- Touchless has no impact on water usage.
- WaterSense<sup>®</sup> toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

# 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 9-7-2019 10:22 - US/CA/MX





## **Codes/Standards**

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description


- 0 White
- 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
- 33 Mexican Sand™
- K4 Cashmere
- 58 Thunder™ Grey
  - 7 Black Black™





# San Souci<sup>®</sup> Comfort Height<sup>®</sup>

one-piece compact elongated 1.28 gpf toilet K-4000

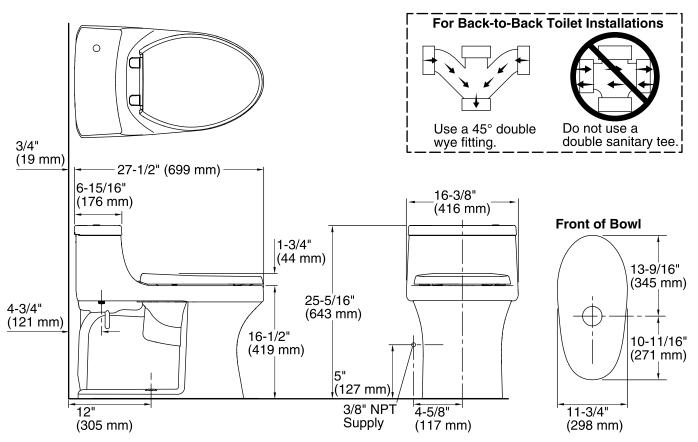

### **Technical Information**

All product dimensions are nominal.

Toilet type:	One-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Compact elongated
Flush type:	Class Five <sup>®</sup>
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	10-3/4" x 7-1/2" (273 mm x 191 mm)
Rim to water surface:	5-3/8" (137 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

#### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

