
BUILDER SERIES









Geneva 3672 (Tile Flange)

Rough-In Dimensions	TR-S-270 TR-IF-270	72" wide x 37-1/4" deep x 22-1/4" high
Finished Dimensions	TR-S-270 TR-IF-270	72" wide x 36" deep x 21" high

Unit Features

- Vacuum Formed Acrylic Surface
- 2" Dia. RH or LH Drain (see reverse side for location)
- 2-1/2" Dia. Overflow (see reverse side for location)
- Twin, Contoured Armrests
- "S" Model: Integral Tile Flange & Full Apron
- "IF" Model: Integral Tile Flange & Partial Apron
- Pre-Leveled Block Base System
- Balsa Wood Core Floor Structure
- Textured Floor Pattern

Special Notes

- Whirlpool System Available (see reverse side for details)
- Air System Available (see reverse side for details)
- UL Listed Whirlpool & Air Systems
- Removable Access Panel Included on "S" Model w. System
- Model Available In Self-Rimming Design

Unit / System Order Number

Acrylic: TR-S-270 R or L Drain / 0ND (soaking tub)

TR-S-270 R or L Drain / 6P (Builder System)
TR-S-270 R or L Drain / CWS (Carress System)
TR-S-270 R or L Drain / AR2 (Revive Air System)

Unit / System Order Number

TR-IF-270 R or L Drain / 0ND (soaking tub)
TR-IF-270 R or L Drain / 6P (Builder System)
TR-IF-270 R or L Drain / CWS (Carress System)
TR-IF-270 R or L Drain / AR2 (Revive Air System)

System Trim

Standard 6P & CWS Trim (order code): White trim on White unit (WHT) - Bone trim on Bone unit (BON) - Biscuit trim on Biscuit unit (BSC)

Acrylic:

BUILDER SERIES

Order Number / Description

CWS: Carress System includes: 4-Adjustable side jets, 2-rotating foot jets, 2-micro pulse back jets, variable flow control, twin air controls, electronic system control, 13.5 amp pump/motor, and a removable

access panel (S model).

Options: In-Line Heater (1*) (order: ILH)
Ozone Generator (1*) (order: OZG)
Chromatherapy Pkg (1*, 2*) (order: CLT)
Water Level Sensor (1*, 2*) (order: LWV)

Trim Upgrade (1*)

Chrome (order: CWS-CHR) Brushed (Satin) Nickel (order: CWS-SNK)

Order Number / Description


6P: Builder System includes: 6-Adjustable jets, twin air controls, pneumatic system control, 5.50 amp pump/motor, and a removable access panel (S model).


Options: In-Line Heater (1*) (order: ILH)
Ozone Generator (1*) (order: OZG)


AR2: Revive Air System (3*) includes: (55) Perimeter air ports, electronic system control, 12.0 amp, 600-watt blower with ceramic heater, and a removable access panel (S model).

Notes: (1*) Factory installed options

(2*) Includes system control upgrade (3*) Available on acrylic models only

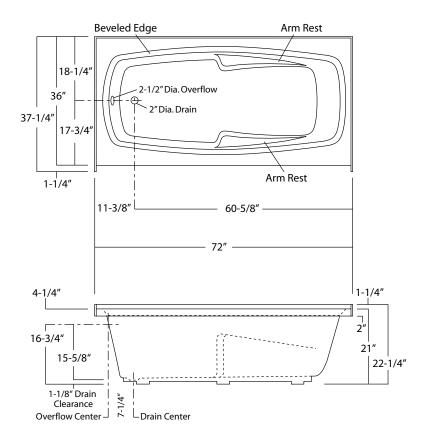





Revive Aire System

Perimeter
Air System Ports
System Control 'S' Blower Location

Geneva 3672: TR-IF-270L (illustrated)

(S model full apron extends down to room floor)

Sump Dimen: 59-1/2" long x 26-1/2" wide x 19" deep

Sump Capacity: 70 gal. Whirlpool Operating: 35 gal.