



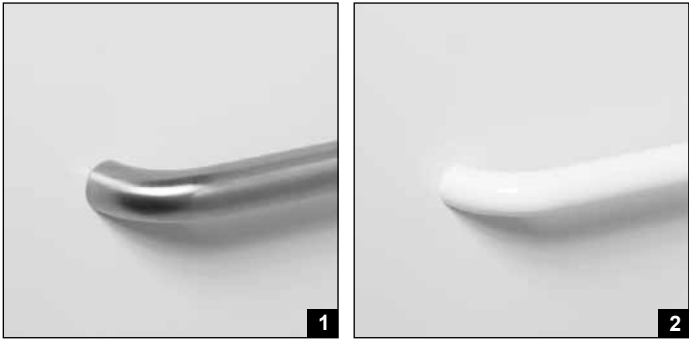

Model ID	Package Code	Description (define configuration referencing drain end)
TSA-DM-6033 L (Std or ABF) / BP1-60 (left drain) TSA-DM-6033 R (Std or ABF) / BP1-60 (right drain)		60" x 32-3/4", end drain, integral dome acrylic tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.50" dia. stainless steel 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
<b>Powder Coated Bar Packages (1.25-inch dia.)</b>		
TSA-DM-6033 L (Std or ABF) / BP1-60 WHT (left drain) TSA-DM-6033 R (Std or ABF) / BP1-60 WHT (right drain)		60" x 32-3/4", end drain, integral dome acrylic tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. white powder coated, 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
TSA-DM-6033 L (Std or ABF) / BP1-60 OFW (left drain) TSA-DM-6033 R (Std or ABF) / BP1-60 OFW (right drain)		60" x 32-3/4", end drain, integral dome acrylic tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. off-white powder coated 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
TSA-DM-6033 L (Std or ABF) / BP1-60 SNK (left drain) TSA-DM-6033 R (Std or ABF) / BP1-60 SNK (right drain)		60" x 32-3/4", end drain, integral dome acrylic tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. nickel 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
	ADD / SHWR ROD-TS	Factory installed 1" dia. stainless steel shower curtain rod.

**Package Notes:**

1. Model available without listed package.
2. For package with vertical bar at entry see ActivLife "BP2-60" package code.

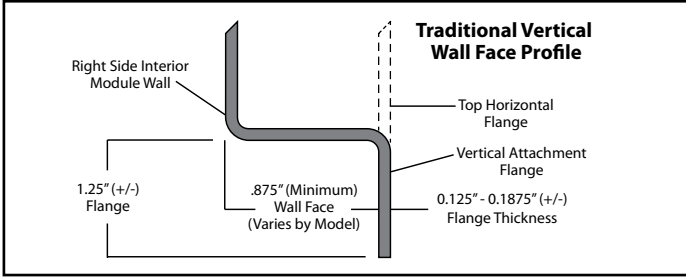

- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)