

SPEAKMAN® SE-7000

Heat Traced Combination Shower with Eye/Face Wash System

FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, bottom supply inlet
- 20 gpm @ 30 psi
- Universal Emergency Sign Included

EYE/FACE WASH FEATURES:

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC:

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 120 vac, 60 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFFD

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1, Factory Mutual Approved

OPTIONS:

Add suffix to model #

Integral:

- Drench hose option
- Immersion well thermometer
- Scald protection valve
- 1 in. union

Field Installed Accessories:

- Pilot light
- Pilot light for Class 1 Division 2 areas
- Area light for Class 1 Division 2 areas - clear globe

WARRANTY:

- 3 year limited



-DH

-IT

-SPV


-UN1

-PL

-PL-C1D2

-VPL-C1D2

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

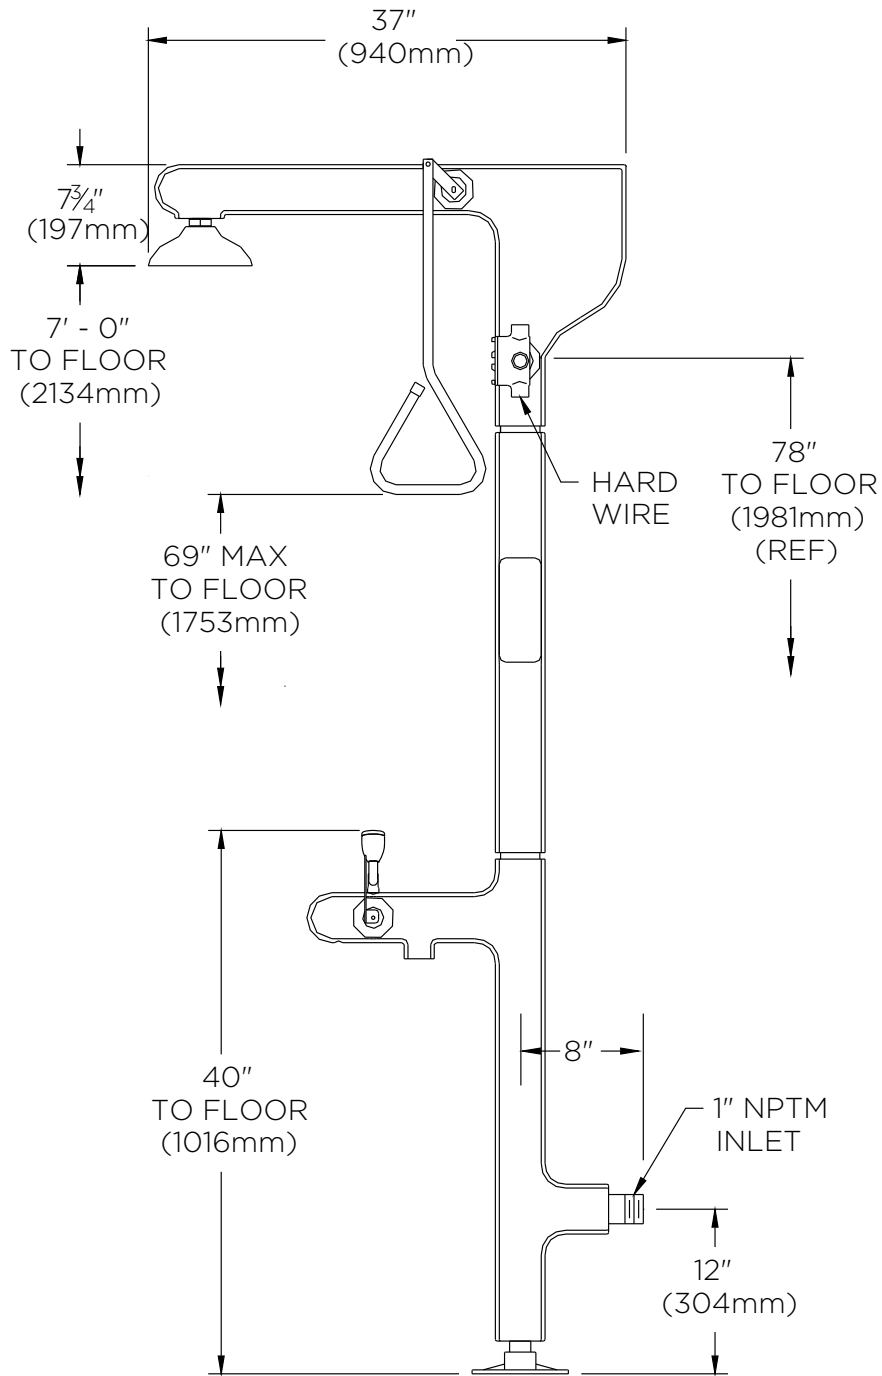

SPEAKMAN® SE-7000-220V50C

Heat Traced Combination Shower with Eye/Face Wash System

FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, bottom supply inlet
- 20 gpm @ 30 psi
- Universal Emergency Sign Included

EYE/FACE WASH FEATURES:

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC:

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 220 vac, 50 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFPD

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1, Factory Mutual Approved

OPTIONS:

Add suffix to model #

Integral:


- Drench hose option -DH
- Immersion well thermometer -IT
- Scald protection valve -SPV
- 1 in. union -UN1

WARRANTY:

- 3 year limited



DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

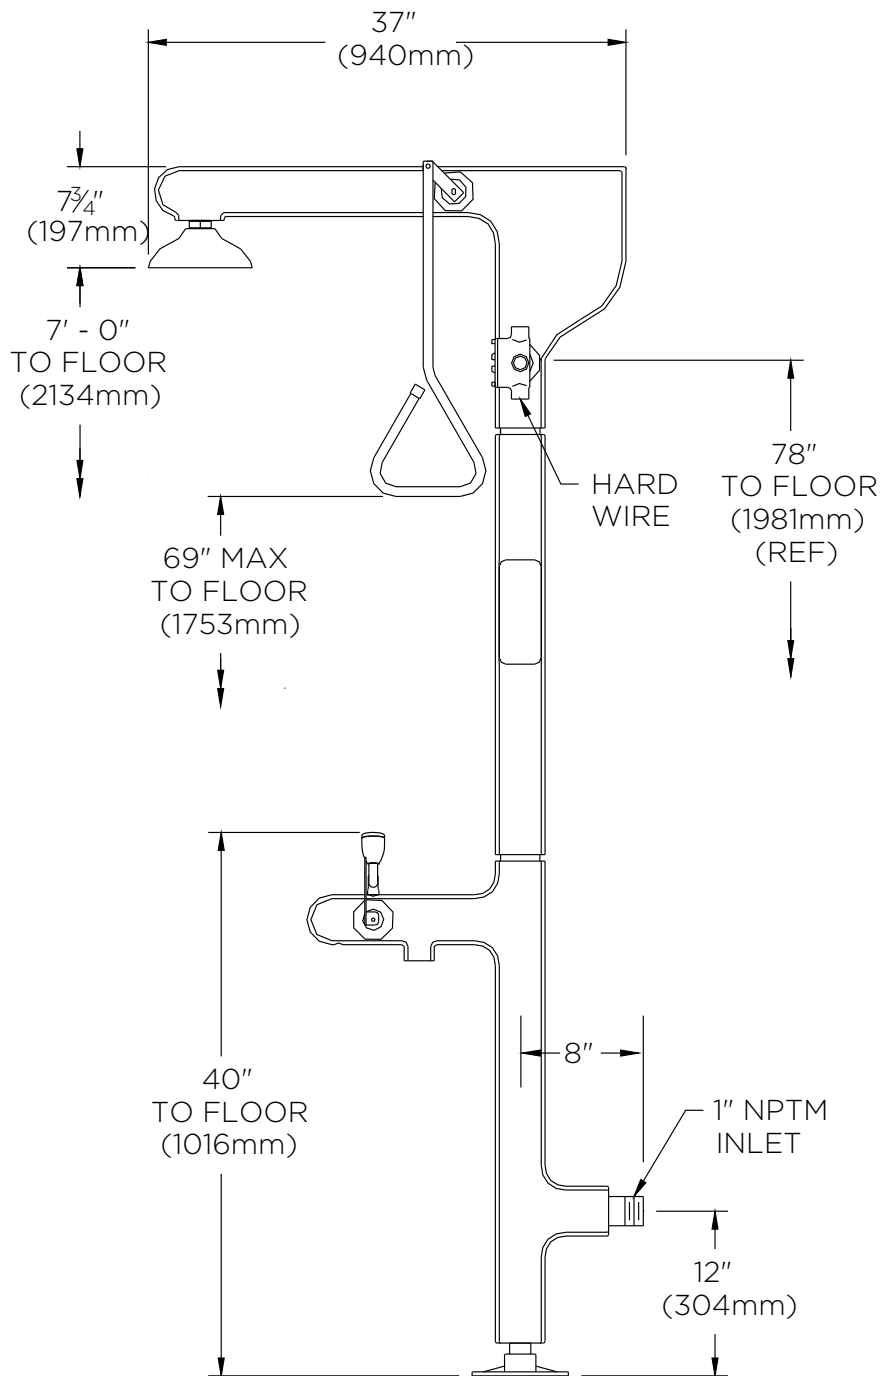

SPEAKMAN® SE-7000-PL

Heat Traced Combination Shower with Eye/Face Wash System

FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, bottom supply inlet
- Pilot light for non-hazardous areas (PL add-on kit)
- 20 gpm @ 30 psi
- Universal Emergency Sign Included

EYE/FACE WASH FEATURES:

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC:

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 120 vac, 60 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFPD

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1, Factory Mutual Approved

OPTIONS:

Add suffix to model #

Integral:

- Drench hose option
- Immersion well thermometer
- Scald protection valve
- 1 in. union

- DH
- IT
- SPV
- UN1

Field Installed Accessories:

- Area light for Class 1 Division 2 areas - clear globe
- Pilot light
- Pilot light for Class 1 Division 2 areas



- VPL-C1D2
- PL
- PL-C1D2

WARRANTY:

- 3 year limited



DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

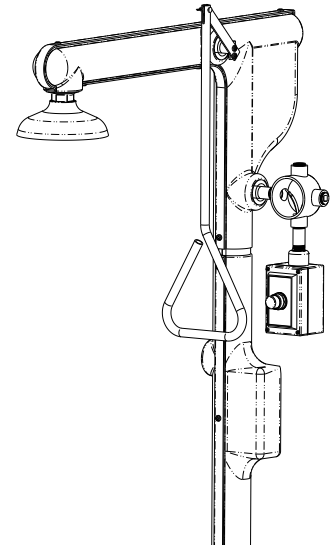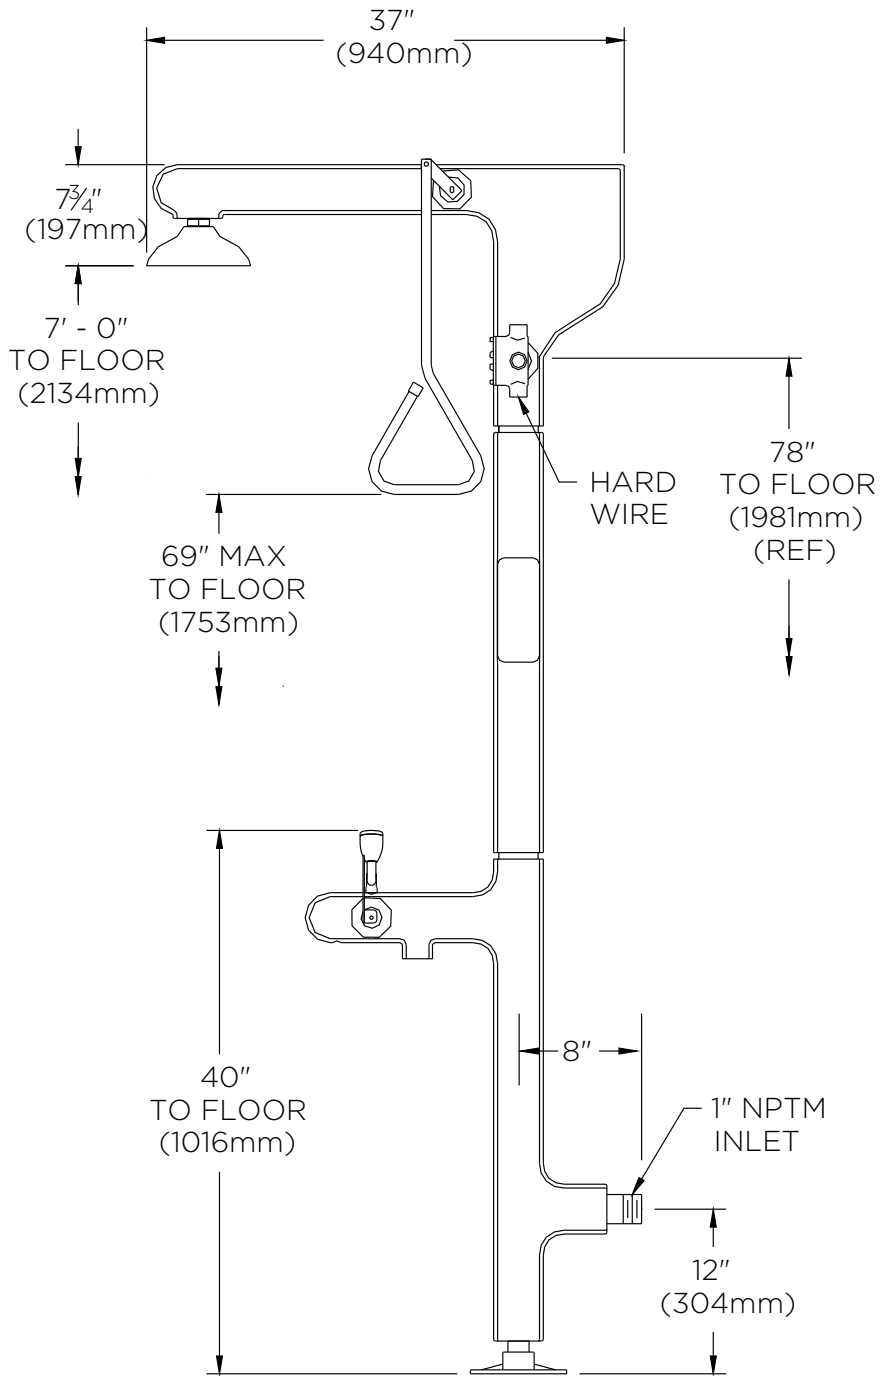

PL-C1D2 add-on kit

SPEAKMAN® SE-7000-PL-C1D2

Heat Traced Combination Shower with Eye/Face Wash System

FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, bottom supply inlet
- Pilot light for class 1 division 2 areas (PL-C1D2 add-on kit)
- 20 gpm @ 30 psi
- Universal emergency sign included

EYE/FACE WASH FEATURES:

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC:

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 120 vac, 60 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFPD

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1, Factory Mutual Approved

OPTIONS:

Add suffix to model #

Integral:

- Drench hose option -DH
- Immersion well thermometer -IT
- Scald protection valve -SPV
- 1 in. union -UN1

Field Installed Accessories:

- Pilot light -PL
- Pilot light for Class 1 Division 2 areas -PL-C1D2
- Area light for Class 1 Division 2 areas - clear globe -VPL-C1D2

WARRANTY:

- 3 year limited





Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

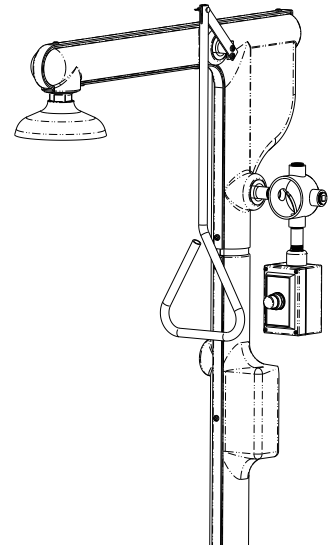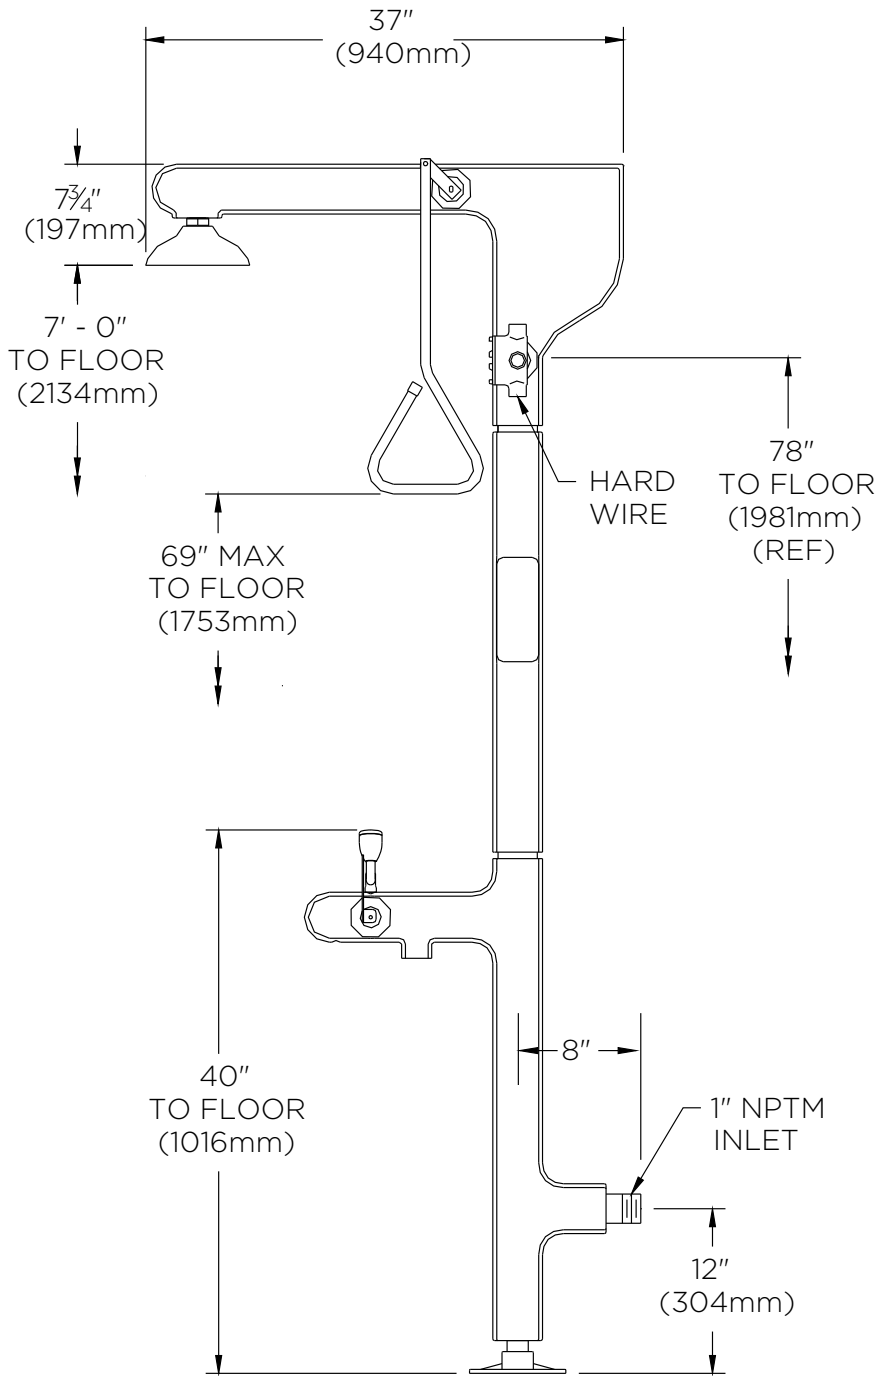

PL-C1D2 add-on kit

SPEAKMAN® SE-7001

Heat Traced Combination Shower with Eye/Face Wash System

FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, top supply inlet
- 20 gpm @ 30 psi
- Universal emergency sign included

EYE/FACE WASH FEATURES:

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC:

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 120 vac, 60 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP: B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFFPD

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

OPTIONS:

Add suffix to model #

Integral:

- Drench hose option -DH
- Immersion well thermometer -IT
- Scald protection valve -SPV
- 1 in. union -UN1

Field Installed Accessories:

- Area light for Class 1 Division 2 areas - clear globe -VPL-C1D2
- Pilot light for Class 1 Division 2 areas -PL-C1D2
- Area light for Class 1 Division 2 areas - clear globe -VPL-C1D2

WARRANTY:

- 3 year limited




Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

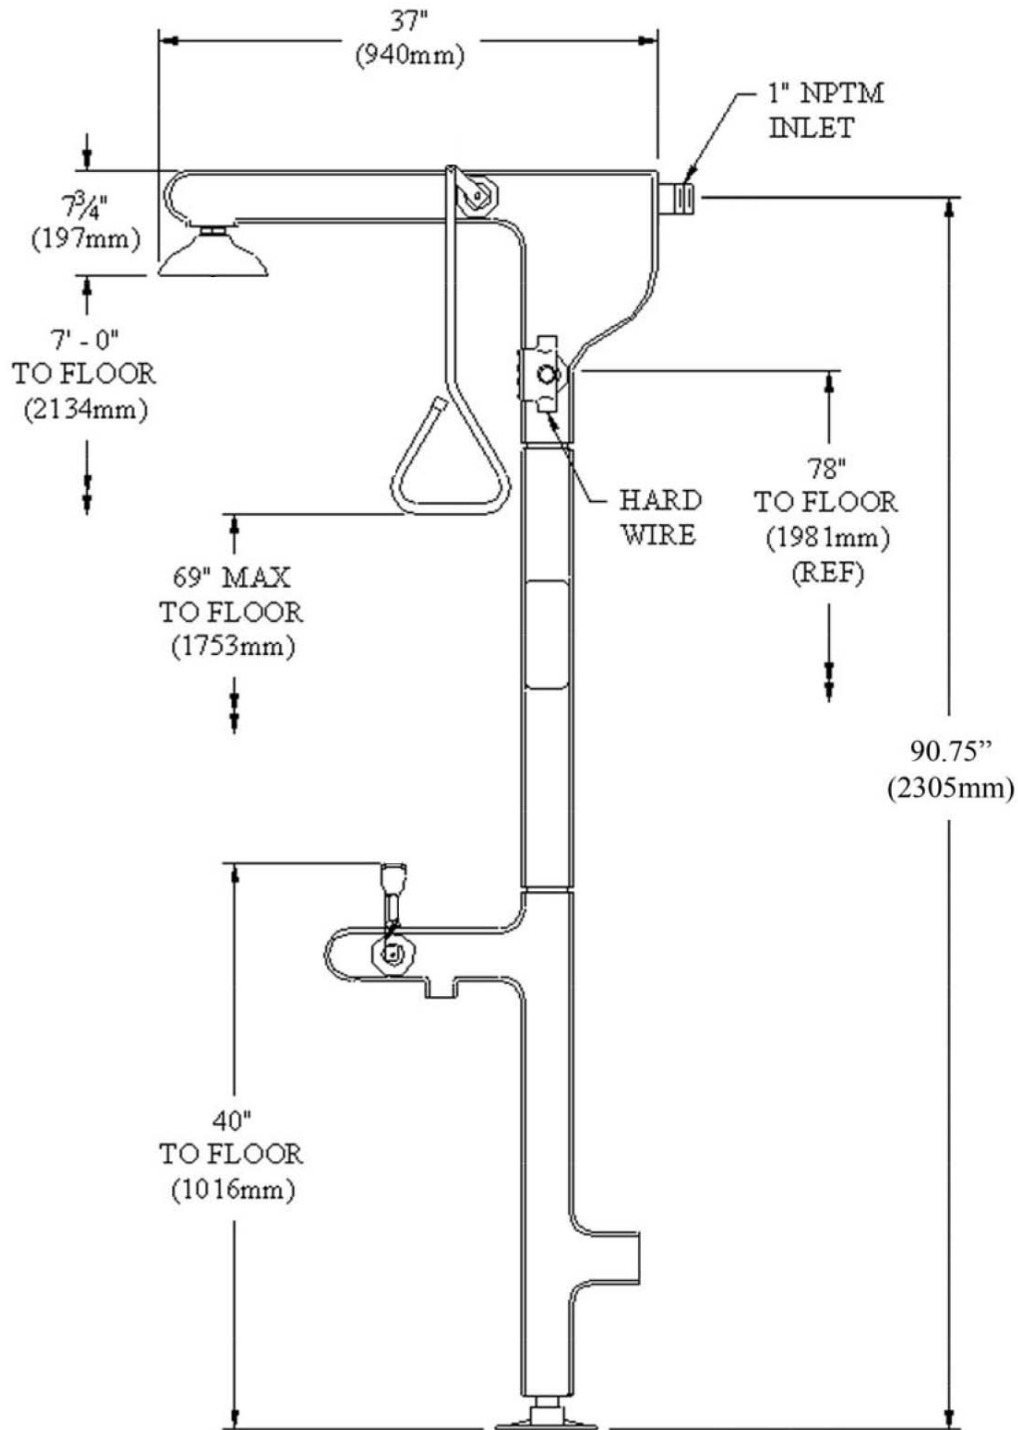

SPEAKMAN® SE-7001-220V50C

Heat Traced Combination Shower with Eye/Face Wash System

FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, top supply inlet
- 20 gpm @ 30 psi
- Universal Emergency Sign Included

EYE/FACE WASH FEATURES:

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC:

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 220 vac, 50 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFFD

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1, Factory Mutual Approved

OPTIONS:

Add suffix to model #

Integral:

- Drench hose option -DH
- Immersion well thermometer -IT
- Scald protection valve -SPV
- 1 in. union -UN1

WARRANTY:

- 3 year limited



Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

