

# Memoirs<sup>®</sup> Classic Comfort Height<sup>®</sup>

#### one-piece compact elongated 1.28 gpf toilet K-6424

#### Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round bowl.
- Comfort Height<sup>®</sup> feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Skirted trapway simplifies cleaning.
- Standard left-hand trip lever included.
- Glenbury<sup>™</sup> Quiet-Close<sup>™</sup> with Grip-Tight seat.
- Patented ReadyLock<sup>™</sup> installation system is a simple solution for skirted toilets that saves time, hassle, and eliminates the need to drill into the floor for a standard 12-inch rough-in.
- Supply line not included.
- Coordinates with other products in the Memoirs collection.

## Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- AquaPiston canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Light-touch canister flush requires a lower actuation force than a flapper.

## Installation

- Standard 12-inch rough-in.
- 10-inch and 14-inch rough-in kits are also available.

## Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

## **Recommended Products/Accessories**

K-75796 Cachet® Nightlight Quiet-Close™ Elongated Toilet Seat K-4108 C<sup>3</sup>®-230 elongated cleansing toilet seat K-5381 14" Rough-in Full Skirt Trap and Attachment System K-5383 10" Rough-in Full Skirt Trap and Attachment System K-9167-L Trip Lever K-484 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

#### 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 9-7-2019 12:13 - US/CA





## **Codes/Standards**

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description


- 0 White 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
- K4 Cashmere
- 58 Thunder™ Grey
- 7 Black Black™





## Memoirs<sup>®</sup> Classic Comfort Height<sup>®</sup>

one-piece compact elongated 1.28 gpf toilet K-6424

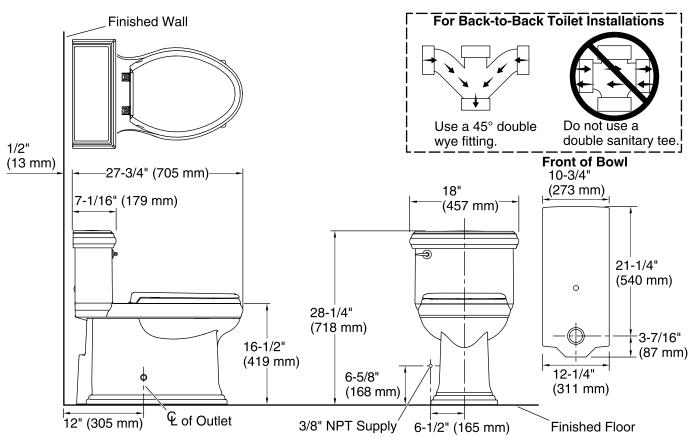

## **Technical Information**

All product dimensions are nominal.

Toilet type:	One-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Compact elongated
Flush type:	AquaPiston <sup>®</sup>
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	9-5/8" x 7-3/8" (244 mm x 187 mm)
Rim to water surface:	5-3/8" (137 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

#### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

