
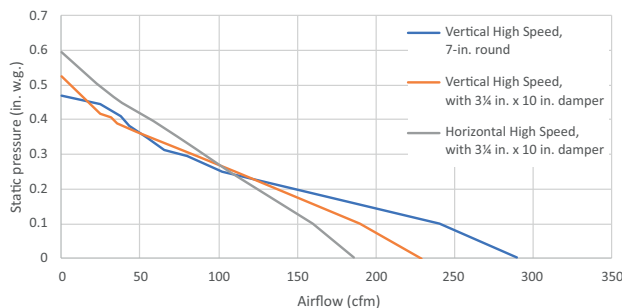


Choose the BUEZ3, 4-way convertible hood for round and rectangular ducted, as well as non-ducted configurations.

SIZE	WHITE ON WHITE	BLACK	STAINLESS STEEL	GREASE FILTER WITH LIGHT LENS (replacement)	GREASE FILTER WITH LIGHT LENS & NON-DUCT FILTER PAD (replacement)
30-in.	BUEZ330WW	BUEZ330BL	BUEZ330SS	R610045	R610050

HVI PERFORMANCE								
Duct Orientation	Size	Damper	Sones		CFM			
			Normal	High	Normal	High 0.25 in. w.g.	High 0.1 in. w.g.	
Vertical - Rectangular	3¼-in. x 10-in.	Included	2.0	6.0	100	105	190	
Horizontal - Rectangular	3¼-in. x 10-in.	Included	2.0*	7.0	90*	105	160	
Vertical - Round	7-in.	BP87Q (purchase separately)	2.0	6.0	130	100	240	

FEATURES	
Max. Blower Airflow	260 CFM*
Control type	2-speed Rocker
Lighting	1-level Rocker 1- 75W, A19 incandescent bulb (purchase separately)
Fan Blade	Polymeric
Grease Filter with Light Lens	Washable aluminum 11-1/2" x 11-3/4"
Grease Filter with Non-Duct Filter & Light Lens	R610050 - 11-1/2" x 11-3/4" (purchase separately)
Installation Hardware	EZ1 brackets
ADA Compatible	yes
AC INPUT	
115V, 60 Hz - 1.8 AMPS	
OPTIONAL ACCESSORIES	
ADA Wiring Kit	HAWRK3
MOUNTING HEIGHT	
18-in. to 24-in. from cooktop to bottom of hood	
LIMITED WARRANTY	
1-year See www.broan.com for full warranty text.	
FOR INDOOR USE ONLY	

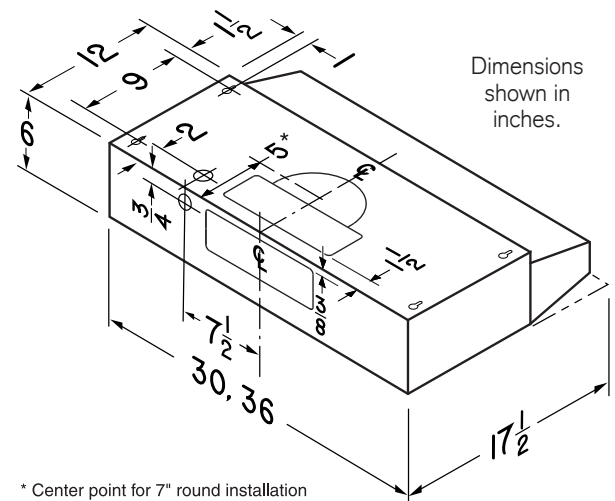

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.